


# PAVEMENT CUT APPLICATION

Town Administration  
PO Box 748  
Morrisville, VT 05661  
admin@morristownvt.org  
www.morristownvt.org

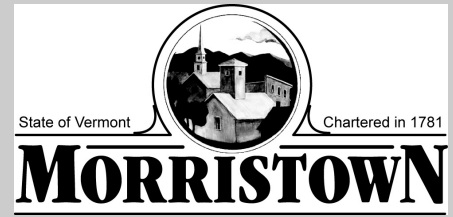

Date

Applicant Name

Address

Telephone

Describe the nature of the work to be done (attach sketch or drawing, if needed)

Date(s) work is to be done

Will traffic control be required?

Yes

No

If yes, describe how traffic control will be maintained

Are you requesting a Police Officer(s) for traffic control?

Yes

No

You agree to pay the Town of Morristown Asphalt & Labor Cost in the amount of :

I have read the attached "Pavement Cut Policy" of the Town of Morristown and agree to abide by its conditions.  
(please type signature)



## **Town of Morristown Pavement Cut Policy**

No one shall cut into the surface of any Town road or sidewalk or otherwise dig or do any work within the Town right-of-way unless he has obtained prior approval from the Town in the form of a Pavement Cut Permit. (The Morrisville Water and Light Department is exempt from the provisions of this policy.)

Pavement Cut Permits will be issued after approval by the Highway Superintendent and Police Chief.

Highway: The Highway Superintendent will approve the permit application under the following conditions:

1. Where the existing road surface is gravel, backfilling materials shall be of the same type as those excavated or shall be of a type deemed suitable by the Highway Superintendent.
  - a. Trenches will be backfilled and compacted in on-foot lifts
  - b. All ditches in the area of construction shall be cleaned, and any guard rail or culvert marking post shall be replaced.
  
2. Where the existing road surface is paved, the same type of paving material or type approved by the Highway Superintendent shall be used for the finished road surface after construction. For example, concrete is to be replaced with concrete and asphalt is to be replaced with asphalt.
  - a. Trenches will be backfilled with materials approved by the Highway Superintendent.
  - b. Trenches will be backfilled and compacted in on foot lifts.
  - c. Where a trench is dug across the traveled and paved area, the trench opening shall be paved over. Where the trench is dug parallel to the line of traffic and in the paved area, the entire paved section of roadway shall be repaved.
  
3. Any sidewalks, storm drains, catch basins, manholes, curbing or utilities damaged during the construction shall be repaired forthwith.